



MSX

Stepper motor power stage for bipolar control

The MSX is a power stage for bipolar control of 2 phase stepper motors. The power stage is available in three power ranges with 15 A_{PEAK} maximum phase current.

Besides full and half step the MSX provides a resolution up to 1/20 MINI Step.

The setting switch provides several phase current profile settings:

- full step (conventional)
- half step
 - without / with torque compensation
 - without / with Current Shaping
- 1/4 - 1/20 step
 - without / with Current Shaping
 - with Current Shaping and BLOW UP.

The current regulation by the SYNCHROCHOP principle ensures operation of the stepper motor and the torque for optimum use.

The MSX is suitable to replace the well-tried older phytron power stages MS0, MS0 and SMD.

Application

As a powerful stepper motor power stage the MSX is suitable for up to 800 Watts shaft power, especially for the handling of discrete components and machine service tasks as well as for high-throughput sorting and assembly machinery.

In Focus




El. Isolated

- Stepper motor power stage for bipolar control of 2 phase stepper motors
- up to 15 A_{PEAK} phase current
- Supply voltage 60 to 120 V_{DC} (permissible range 40 to 160 V_{DC})
- DIP switches for Overdrive and Boost functions, Activation and Preferential Motor Direction
- Step resolution from full step to 1/20 step

Highlights


Current Shaping

The CS (Current Shaping) function allows adapting the actual current shape to the selected current curve over a wide frequency range.

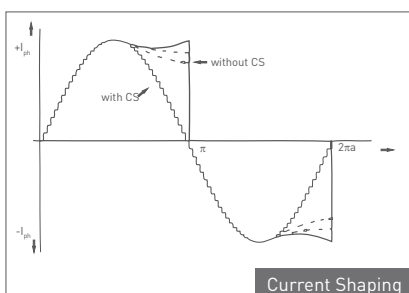

BLOW UP

Improvement of run and acceleration behaviour can be achieved - dependent on the motor type - by the current shape optimising BLOW UP function.

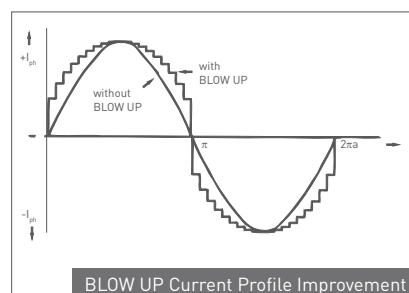

Industrial

Specification

Mechanical

| | |
|------------------------|---|
| Dimensions (W x H x D) | 70.8 (14HP) x 128.4 (3U) x 188 mm |
| Weight | Approx. 970 g |
| Mounting | Designed for installation into 19"/3U sub-racks, 32 pin connector acc. to DIN 41612, version D |

Features

| | |
|----------------------------|--|
| Stepper motors | Suitable for the control of 2 phase stepper motors with 4, (6) or 8 lead wiring |
| Phase current | max. 15.4 A _{PEAK} |
| Supply voltage | 60 to 120 V _{DC} (permissible range 40 to 160 V _{DC}) |
| Adjustable step resolution | Full step, half step, 1/4, 1/10, 1/20 of a full step, with and without torque balance |
| Cable length | Motor : shielded: 50 m max. Signal: shielded: 100 m max. |
| Diagnosable errors | Over-/undervoltage (< 40 V _{DC} or > 160 V _{DC}), overtemperature (T > 85 °C), overcurrent, short circuit |

Interfaces

| | |
|------------------|--|
| Analogue outputs | A, B, C, D for a 2 phase stepper motor |
| Digital outputs | Optically isolated from the motor voltage, type Open-Collector Darlington; I _{max} = 20 mA, U _{max} = 45 V, U _{CEsat} at 20 mA < 0.6 V Basic position, Error |
| Inputs | All inputs include an optocoupler with series resistors for 5 V or 24 V supply voltage: Control pulse, Motor direction, Boost, Activation, Reset (can be enabled by a jumper) |

Communication and Programming

| | |
|-------------------|--|
| Rotary switches | Setting of run and stop current, step resolution and current shape |
| DIP switches | Setting of Overdrive and Boost function, Activation and preferential motor direction |
| Diagnostic by LED | Basic position, overload, supply failure, overtemperature |



Operating Conditions

| | |
|--------------------------------|--|
| Temperature | Operation: +4 to +40 °C (we suggest additional cooling with higher operating temperatures) Storage: -25 to +55 °C Transport: -25 to +85 °C |
| Degree of pollution | Level 2 acc. to EN 50178 |
| Relative humidity | 5 – 85 % class 3K3 non condensing |
| Protection class | IP 20 |
| EMC immunity / EMC emission | Acc. to EN 50178: high-voltage current Acc. to EN 61000-6-1, 2, 3, 4: EMC and RFI immunity |
| Approval | CE |



Design: plug-in board for 19" sub-rack Euro-size 100 x 160 mm

Dimensions in mm

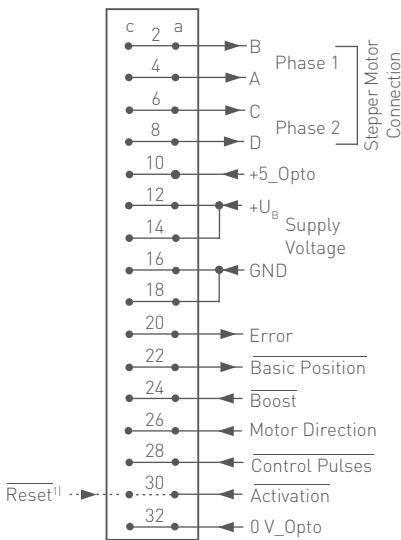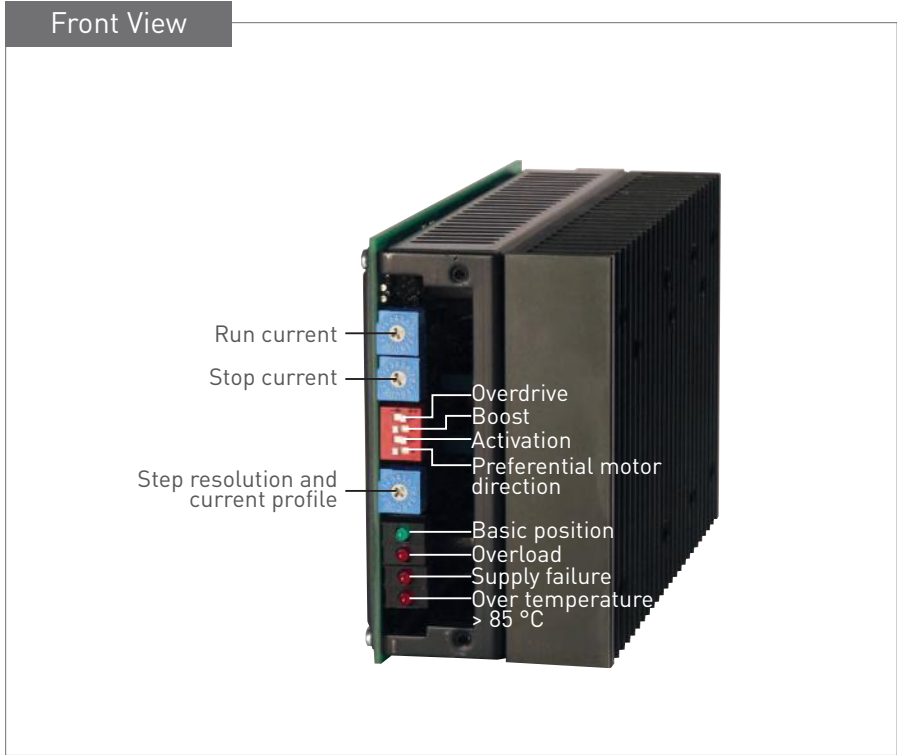

¹⁾Standard version MSX (5 V)
Activation signal: pin 30a and c

Version MSX (5 V-Reset) with Reset input
Activation: pin 30a / Reset: pin 30c

Pin Assignment



phytron also delivers fully assembled 19" rack plug-in units with integrated power supply and optional cooling fan tray.
Up to 4 MSX power stages are possible.

Industrial

Design Versions

The MSX (120 V type) replaces the following well-tried phytron power stages:

| | |
|---------------------|---|
| MSX 152 (5 V) | Standard, replacement for MSO and MSO _{MINI} |
| MSX 152 (24 V) | Replacement for SMD |
| MSX 152 (5 V Reset) | Additional Reset input (jumper plugged) |

Ordering Code

The variable elements of the product are displayed in colour.



| | | | | | |
|---------------|-----|-----|-------|------|--|
| Ordering code | MSX | 152 | - 120 | MINI | |
|---------------|-----|-----|-------|------|--|

Options

| | | |
|----------|---------------|--|
| Optional | Reset 24 V | Standard MSX (5 V): without additional designation Reset input activated, 5 V input level 24 V input level |
|----------|---------------|--|

Optional Accessories

- Front panel (14 HP) with handle
- Mating connector with 32 pin connector
- G-MSX adapter board for easy mounting the MSX, with connectors for motor cable, signal leads and supply voltage
- Damping SB 234 module for 90 V (#02000748)
- Damping SB 234 module for 120 V (#02002165)

Any questions? Please contact us.

Morskate Aandrijvingen BV

Oosterveldsingel 47A
7558 PJ Hengelo (Ov)
The Netherlands

NL
T +31 (0)74 - 760 11 11
info@morskateaanrijvingen.nl
www.morskateaanrijvingen.nl

DE
T +49 692 - 222 34 95
info@morskateantriebstechnik.de
www.morskateantriebstechnik.de

EN
T +31 (0)74 - 760 11 11
info@morskatedrivetechnology.com
www.morskatedrivetechnology.com

Morskate®



Any questions? Please contact us.

Morskate Aandrijvingen BV

Oosterveldsingel 47A
7558 PJ Hengelo (Ov)
The Netherlands

NL

T +31 (0)74 - 760 11 11
info@morskateaandrijvingen.nl
www.morskateaandrijvingen.nl

DE

T +49 692 - 222 34 95
info@morskateantriebstechnik.de
www.morskateantriebstechnik.de

EN

T +31 (0)74 - 760 11 11
info@morskatedrivetechnology.com
www.morskatedrivetechnology.com