


## Slat Top Steel Chain

Series **uni 881** Type **Tab**

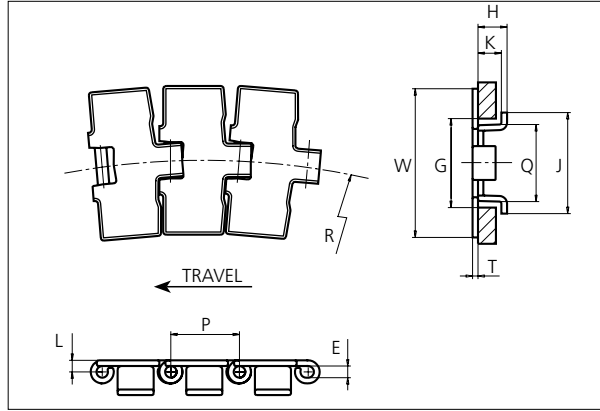

**Slat Top Steel Chain**  
 Side flexing chain  
 Pitch: 38.1 mm (1.50 in)  
 Backflex radius:  
 76.2 mm (3.00 in)  
  
 Standard shipping lengths:  
 coils of 80 links  
 = 3.048 m (10.0 ft)

STANDARD

E		G		H		J		K		L		P		Q		T	
mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
6.4	0.25	44.5	1.75	16.3	0.64	56.2	2.21	12.7	0.50	6.5	0.26	38.1	1.50	43.0	1.69	3.0	0.12

SIDE FLEXING

	Width (W)		Min. radius (R)		Weight		Permissible tensile strength N/lbf	Chain material	Pin material*	Surface	
	mm	in	mm	in	kg/m	lb/ft				Roughness	Hardness
<b>K325</b>	82.6	3.25	457	17.99	2.90	1.95	4000 / 899	S1045 (Heat-treated Carbon Steel)	S1045 (Case-hardened Carbon Steel)	< 0.5 µm	43 HRC
<b>K450</b>	114.3	4.50	500	19.69	3.60	2.42					
<b>K750</b>	190.5	7.50	500	19.69	5.30	3.56					


PITCH 38.1 MM/1.50 IN

\* Chains with special hardened pin (HP) for additional wear resistance and higher corrosion strength are made to order.

Any questions? Please contact us.

## Slat Top Stainless Steel Chain

Series **uni 881** Type **Tab**

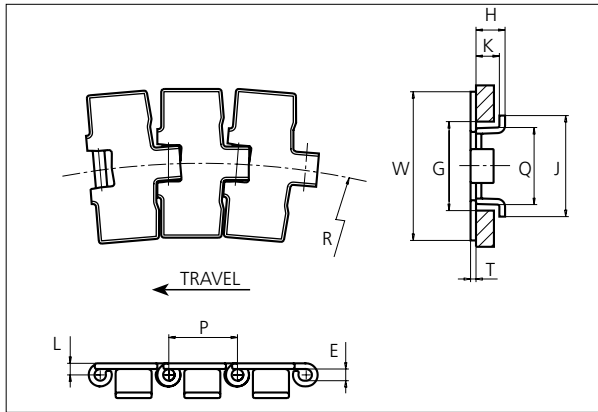

**Slat Top Stainless Steel Chain**  
 Side flexing chain  
 Pitch: 38.1 mm (1.50 in)  
 Backflex radius:  
 76.2 mm (3.00 in)  
  
 Standard shipping lengths:  
 coils of 80 links  
 = 3.048 m (10.0 ft)

STANDARD

E		G		H		J		K		L		P		Q		T	
mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
6.4	0.25	44.5	1.75	16.3	0.64	56.2	2.21	12.7	0.50	6.5	0.26	38.1	1.50	43.0	1.69	3.0	0.12

	Width (W)		Min. radius (R)		Weight		Permissible tensile strength N/lbf	Chain material	Pin material*	Surface	
	mm	in	mm	in	kg/m	lb/ft				Roughness	Hardness
<b>K325</b>	82.6	3.25	200	7.90	2.90	1.95	2250 / 506	AISI 430 (Work hardened ferritic Stainless Steel)	AISI 431 (Work hardened magnetic Stainless Steel)	< 0.5 µm	20 HRC
			457	18.00							
<b>K450</b>	114.3	4.50	500	19.69	3.60	2.42					
<b>K750</b>	190.5	7.50	500	19.69	5.30	3.56					


\* Chains with special hardened pin (HP) for additional wear resistance and higher corrosion strength are made to order.

### Accessories

#### Rubber Top



Non stock item. Contact Customer Service for delivery time.

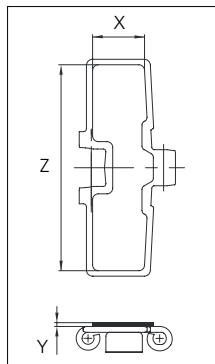

Width	Rubber material	Z		X		Y	
		mm	in	mm	in	mm	in
<b>K325</b>	06 <b>K</b>	77.0	3.03	28.0	1.10	2.0	0.08
<b>K450</b>	06 <b>K</b>	108.0	4.25	27.0	1.06	2.0	0.08
<b>K750</b>	06 <b>K</b>	184.0	7.24	26.0	1.02	2.0	0.08


SIDE FLEXING

PITCH 38.1 MM/1.50 IN

Any questions? Please contact us.

## Slat Top Stainless Steel Chain

Series **uni 881** Type **Tab**

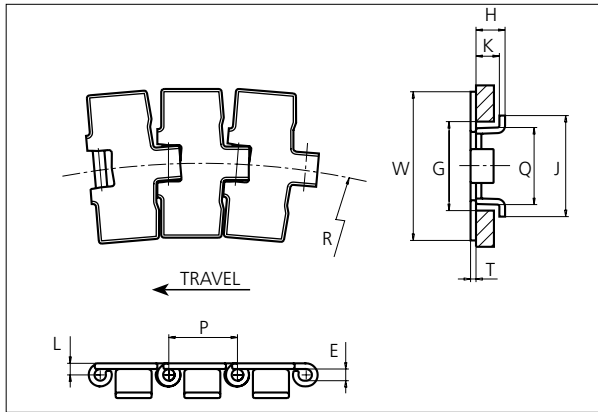

### Slat Top Stainless Steel Chain

Side flexing chain  
Pitch: 38.1 mm (1.50 in)  
Backflex radius:  
76.2 mm (3.00 in)

Standard shipping lengths:  
coils of 80 links  
= 3.048 m (10.0 ft)

STANDARD

E		G		H		J		K		L		P		Q		T	
mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
6.4	0.25	44.5	1.75	16.3	0.64	56.2	2.21	12.7	0.50	6.5	0.26	38.1	1.50	43.0	1.69	3.0	0.12

	Width (W)		Min. radius (R)		Weight		Permissible tensile strength N/lbf	Chain material	Pin material*	Surface	
	mm	in	mm	in	kg/m	lb/ft				Roughness	Hardness
<b>K325</b>	82.6	3.25	457	17.99	2.90	1.95	2250 / 506	AISI 304 (Work hardened Crome-nickel 18/8 austenitic Stainless Steel)	AISI 304 (Work hardened Crome-nickel 18/8 austenitic Stainless Steel)	< 0.5 µm	26 HRC
<b>K450</b>	114.3	4.50	500	19.69	3.60	2.42					
<b>K750</b>	190.5	7.50	500	19.69	5.30	3.56					


\* Chains with special hardened pin (HP) for additional wear resistance and higher corrosion strength are made to order.

### Accessories

#### Rubber Top



Non stock item. Contact Customer Service for delivery time.

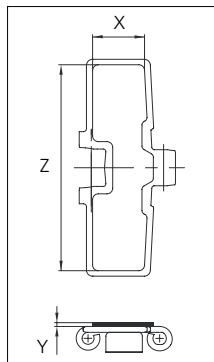

Width	Rubber material	Z		X		Y	
		mm	in	mm	in	mm	in
<b>K325</b>	06 <b>K</b>	77.0	3.03	28.0	1.10	2.0	0.08
<b>K450</b>	06 <b>K</b>	108.0	4.25	27.0	1.06	2.0	0.08
<b>K750</b>	06 <b>K</b>	184.0	7.24	26.0	1.02	2.0	0.08

SIDE FLEXING

PITCH 38.1 MM/1.50 IN

Any questions? Please contact us.

## Sprocket

No of teeth	Pitch diameter		Overall-diameter		Min. ø bore		Max. ø bore		Hub-diameter		Dimension A		Dimension B		Molded PA6 LG	Molded Cast Iron	Machined PA6
	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in			
Z19	117.3	4.62	117.0	4.61	20.0	0.79	40.0	1.57	58.0	2.28	58.7	2.31	64.5	2.54	✓	✓	
Z21	129.2	5.09	130.0	5.12	20.0	0.79	40.0	1.57	58.0	2.28	65.0	2.56	70.5	2.78	✓	✓	
Z23	141.2	5.56	142.0	5.59	20.0	0.79	40.0	1.57	58.0	2.28	71.2	2.80	76.5	3.01	✓	✓	
Z25	153.2	6.03	155.0	6.10	20.0	0.79	40.0	1.57	58.0	2.28	77.4	3.05	82.5	3.25	✓	✓	
Z27	165.2	6.50	167.0	6.57	20.0	0.79	70.0	2.76	n/a	n/a	83.6	3.29	88.5	3.48		✓	✓
Z29	177.2	6.98	179.0	7.05	20.0	0.79	70.0	2.76	n/a	n/a	89.8	3.54	94.6	3.72		✓	✓
Z31	189.3	7.45	192.0	7.56	20.0	0.79	70.0	2.76	n/a	n/a	95.9	3.78	100.6	3.96		✓	✓

## Two part sprocket

No of teeth	Pitch diameter		Overall-diameter		Min. ø bore		Max. ø bore		Hub-diameter		Dimension A		Dimension B		Molded PA6 LG
	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	
Z19	117.3	4.62	117.0	4.61	20.0	0.79	40.0	1.57	58.0	2.28	58.7	2.31	64.5	2.54	✓
Z21	129.2	5.09	130.0	5.12	20.0	0.79	40.0	1.57	58.0	2.28	65.0	2.56	70.5	2.78	✓
Z23	141.2	5.56	142.0	5.59	20.0	0.79	40.0	1.57	58.0	2.28	71.2	2.80	76.5	3.01	✓
Z25	153.2	6.03	155.0	6.10	20.0	0.79	40.0	1.57	58.0	2.28	77.4	3.05	82.5	3.25	✓

### Molded sprocket



### Cast iron sprocket




### Machined sprocket



### Two part sprocket



Non standard material and color:  
See uni Material and Color Overview.

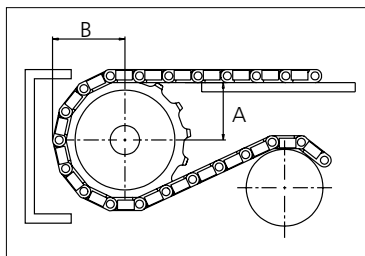

Please ensure that sufficient size shaft and keyway are chosen for corresponding load.

Other sprocket sizes are available upon request

Width of tooth: 31.8 mm/1.25 in

Width of sprocket: 42.3 mm/1.67 in

uni Retainer Rings: See uni Retainer Ring data sheet

uni Idler: See uni Idler data sheet

uni Guide Rings can be mounted on cast iron and machined sprockets. See uni Guide Rings data sheet.

uni 881 Tab/160624

Any questions? Please contact us.

### Morskate Aandrijvingen BV

Oosterveldsingel 47A  
7558 PJ Hengelo (Ov)  
The Netherlands

NL

T +31 (0)74 - 760 11 11  
info@morskateaandrijvingen.nl  
www.morskateaandrijvingen.nl

DE

T +49 692 - 222 34 95  
info@morskateantriebstechnik.de  
www.morskateantriebstechnik.de

EN

T +31 (0)74 - 760 11 11  
info@morskatedrivetechnology.com  
www.morskatedrivetechnology.com